


Gurit Kerdyn™

STRUCTURAL FOAM CORE
RECYCLED AND RECYCLABLE

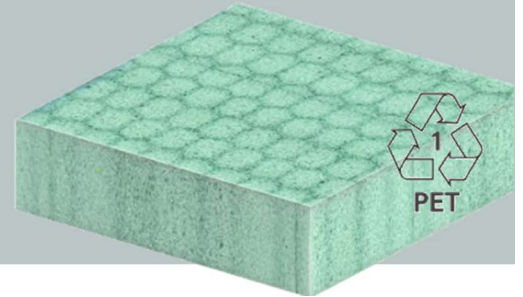

Kerdyn™ is a thermoplastic foam developed to respond to the growing need for structural core materials and reduce product's carbon footprint and materials waste.

Based on recycled PET and fully recyclable material, Kerdyn™ is a highly stable and adaptable core material with good mechanical properties, lower resin uptake, and then an excellent balance between performances, cost, density and processability.

Kerdyn™ is compatible with mostly all resin systems including vinyl ester, epoxy, unsaturated polyester and usable with a wide range of processing technologies including vacuum infusion, prepreg, wet lay-up, bonding, kitting, thermoforming.

It can be processed at high temperatures, withstanding high exotherms and offers outstanding chemical resistance, low water absorption and a very good adhesion.

Kerdyn™ is available in a wide range of densities and thicknesses.

Product can be delivered in Lite version with sealed surface to lower the resin uptake.

Surface finishing options to provide more flexibility in shaping and improve processing performances (pinholes, cuts, grooving or scrimmed) are available upon request.

Gurit can even tailor to your specific requirements through own kitting capabilities, please contact your local representative for further information.

TYPICAL APPLICATIONS

As highly consistent extruded foam, Kerdyn™ is ideal for applications in:

- **Wind energy** for rotor blade, nacelle, spinner, covers, tips
- **Marine** for deck, floor, hull, structures, bulkhead, interiors, furniture
- **Industrial** for housing, container, doors, window frames, domestic goods
- **Transportation** for automotive interiors, bus, trucks flooring, caravanning

- Density from 80 to 300 kg/m³
- Fully recyclable material
- Up to 100% recycled PET based product range
- Sustainable alternative to other foams or wood-based products
- Wide range of thicknesses
- Low resin uptake performance
- Wide processing methods
- Good mechanical properties
- Good chemical resistance
- Good adhesion skin to core
- Plain, finished, kitted sheets
- Sealed surface available
- DNV Certified



TECHNICAL INFORMATION

General working practices apply to these products can be obtained from the [Gurit Guide to Composites](#) or by contacting a Gurit representative (see contact information).

PROPERTY	UNIT	Kerdyn™ 80	Kerdyn™ 100	Kerdyn™ 115	Kerdyn™ 135	Kerdyn™ 150	Kerdyn™ 200	Kerdyn™ 235	Kerdyn™ 250	Kerdyn™ 300	STANDARD
Nominal Density	kg/m ³	80	100	115	135	150	200	235	250	300	ISO 845
	lb/ft ³	4.99	6.24	7.18	8.43	9.39	12.49	14.67	15.61	18.73	
Typical Density range	kg/m ³	75-85	95-105	110-120	130 - 140	143-157	190-210	225-245	240-260	288-312	ISO 845
	lb/ft ³	4.68-5.31	5.93-6.55	6.87-7.49	8.11-8.74	8.93-9.80	11.86-13.11	14.05-15.29	14.98-16.23	17.98-19.48	
Compression Strength	MPa	0.86	1.30	1.65	2.12	2.49	3.79	4.63	5.21	6.73	ISO 844
	Psi	125	189	239	307	361	550	672	756	976	
Compressive Modulus	MPa	74	91	105	126	142	203	246	276	360	ISO 844
	Psi	10 733	13 198	15 299	18 275	20 595	29 443	35 679	40 030	52 214	
Shear Strength 0°	MPa	0.59	0.80	0.97	1.20	1.40	2.04	2.23	2.36	2.66	ASTM C-273
	Psi	81.22	116	141	174	203	296	323	342	386	
Shear Modulus 0°	MPa	18	25	30	37	43	62	76	83	105	ASTM C-273
	Psi	2 611	3 626	4 351	5 399	6 237	8 992	11 022	12 038	15 229	
Shear Strength 90°	MPa	0.58	0.79	0.95	1.17	1.35	1.95	2.17	2.31	2.65	ASTM C-273
	Psi	84.12	114	138	170	196	283	315	335	384	
Shear Modulus 90°	MPa	16	23	27	34	39	57	69	75	93	ASTM C-273
	Psi	2 321	3 336	3 916	4 931	5 656	8 268	10 008	10 878	13 488	
Shear Elongation	%	16	16	13	10	9	6	5	4	-	ASTM C-273
Tensile Strength	MPa	1.54	1.82	2.02	2.27	2.45	2.98	3.26	3.42	3.77	ASTM D-1623
	Psi	223	264	293	329	355	432	473	496	547	
Tensile Modulus	MPa	85	103	116	136	152	214	260	290	-	ASTM D-1623
	Psi	12 328	14 939	16 825	19 725	22 045	31 038	37 710	42 061	-	
Fire Properties	Class	Class E*									EN 13501-1

* Rating dependent on thickness and density, users should test proposed configuration

The technical data are means values for information based on results achieved under specific and/or defined test conditions. Customers with specific requirements must carry out tests to prove conformity to their own requirements.

PRODUCT DELIVERY

	UNIT	Length	Width	Diagonal	Thickness
Dimensions	mm	2440	1005 / 1220	⁽¹⁾	5 – 200 ⁽²⁾
	inches	96	39.5 / 48	⁽¹⁾	5 – 200 ⁽²⁾
Tolerances ⁽³⁾	mm	-3 / +6	-3 / +5	< 2	< 100: +/- 0.5 ≥ 100: +/- 1
	inches	-0.12 / 0.24	-0.12 / 0.20	< 0.08	< 3.9: +/- 0.02 ≥ 3.9: +/- 0.04

(1) Depending on combination of length/width

(2) Maximum thickness depending on the density

(3) Tolerances at room temperature

Physical properties are not affected by variances in colour.

Customs tariff code: 39211900

NOTICE

All advice, instruction or recommendation is given in good faith but the selling Gurit entity (the Company) only warrants that advice in writing is given with reasonable skill and care. No further duty or responsibility is accepted by the Company. All advice is given subject to the terms and conditions of sale (the Conditions) which are available on request from the Company or may be viewed at Gurit's Website: <https://www.gurit.com/terms-and-conditions/>

The Company strongly recommends that Customers make test panels in the final process conditions and conduct appropriate testing of any goods or materials supplied by the Company prior to final use to ensure that they are suitable for the Customer's planned application. Such testing should include testing under conditions as close as possible to those to which the final component may be subjected. The Company specifically excludes any warranty of fitness for purpose of the goods other than as set out in writing by the Company. Due to the varied nature of end-use applications, the Company does, in particular, not warrant that the test panels in the final process conditions and/or the final component pass any fire standards.

The Company reserves the right to change specifications and prices without notice and Customers should satisfy themselves that information relied on by the Customer is that which is currently published by the Company on its website. Any queries may be addressed to the Technical Services Department.

Gurit is continuously reviewing and updating literature. Please ensure that you have the current version by contacting your sales contact and quoting the revision number in the bottom left-hand corner of this page.

CONTACT INFORMATION

Please find your local contact information at www.gurit.com

Otherwise contact customer.support@gurit.com

24-HOUR CHEMICAL EMERGENCY NUMBER

For advice on chemical emergencies, spillages, fires or exposures:

Europe	+44 1273 289451
Americas	+1 646 844 7309
APAC	+65 3158 1412

All trademarks used or mentioned in this document are protected by law.